


MODIF EXPORT SUPERSTAR 3900 EFT

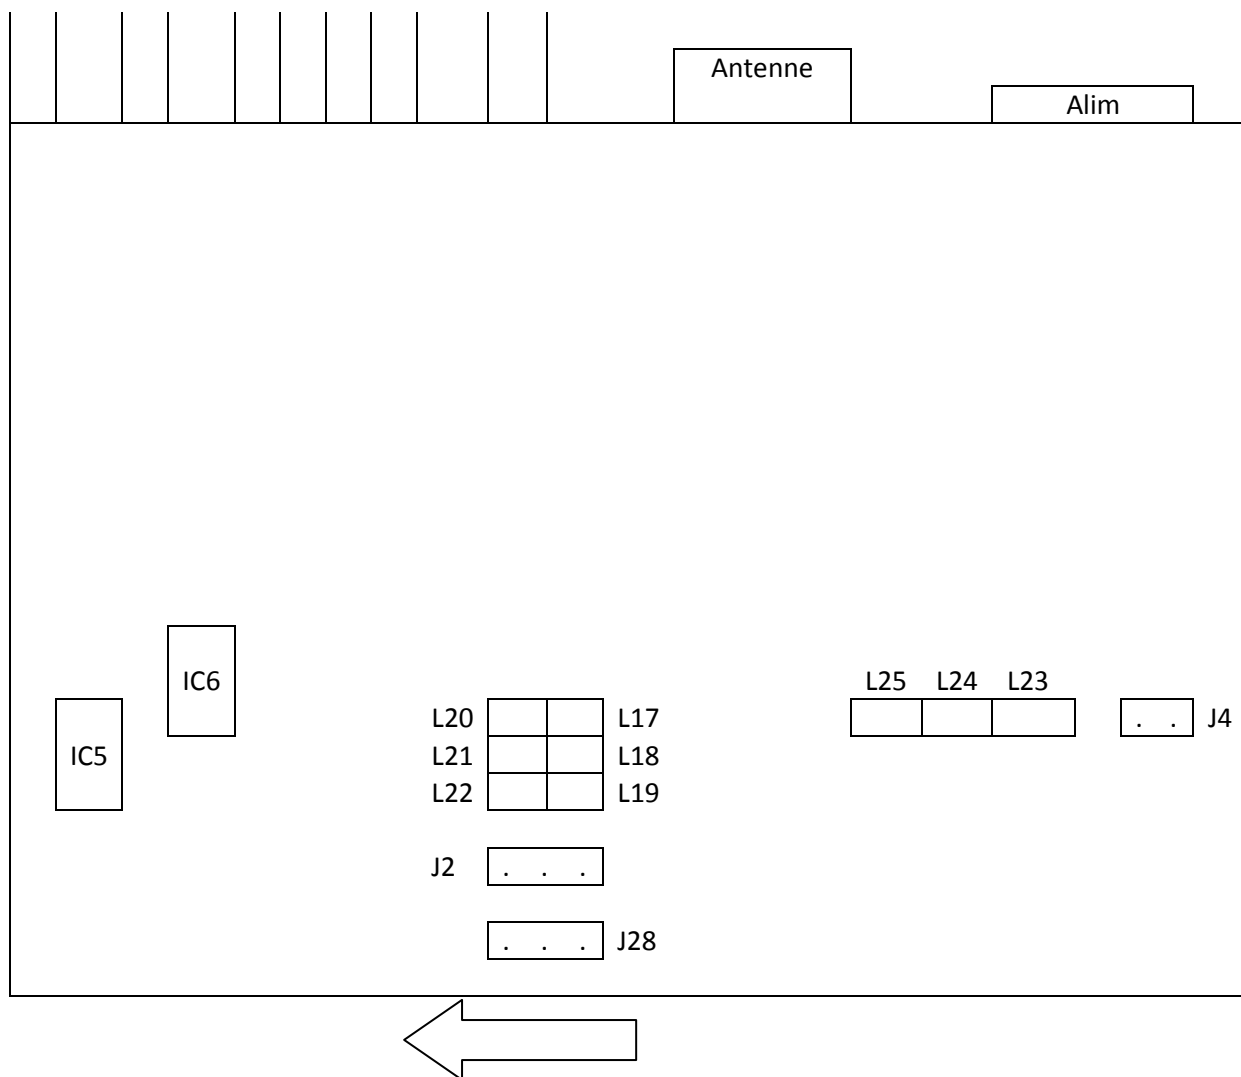


MOVE THE STRAP **J28** OF A NOTCH IN THE SENSE OF THE ARROW
 MOVE THE CONNECTOR **J4** ON THE CONNECTOR **J2**
 DELETE THE WELDED RESISTANCE ON **IC5** (weld side)

- VR 13 MODULATION SSB
- VR 17 POWER SSB
- VR 16 MODULATION AM
- VR 14 POWER AM/FM
- VR 18 ADJUSTMENT MINIMUM POWER
- VR 9 VU-METER TX


Modif export en image du SS 3900 EFT

Démonter les 2 capots et retirer la résistance côté soudures


DELETE THE WELDED RESISTANCE ON **IC5** (weld side)

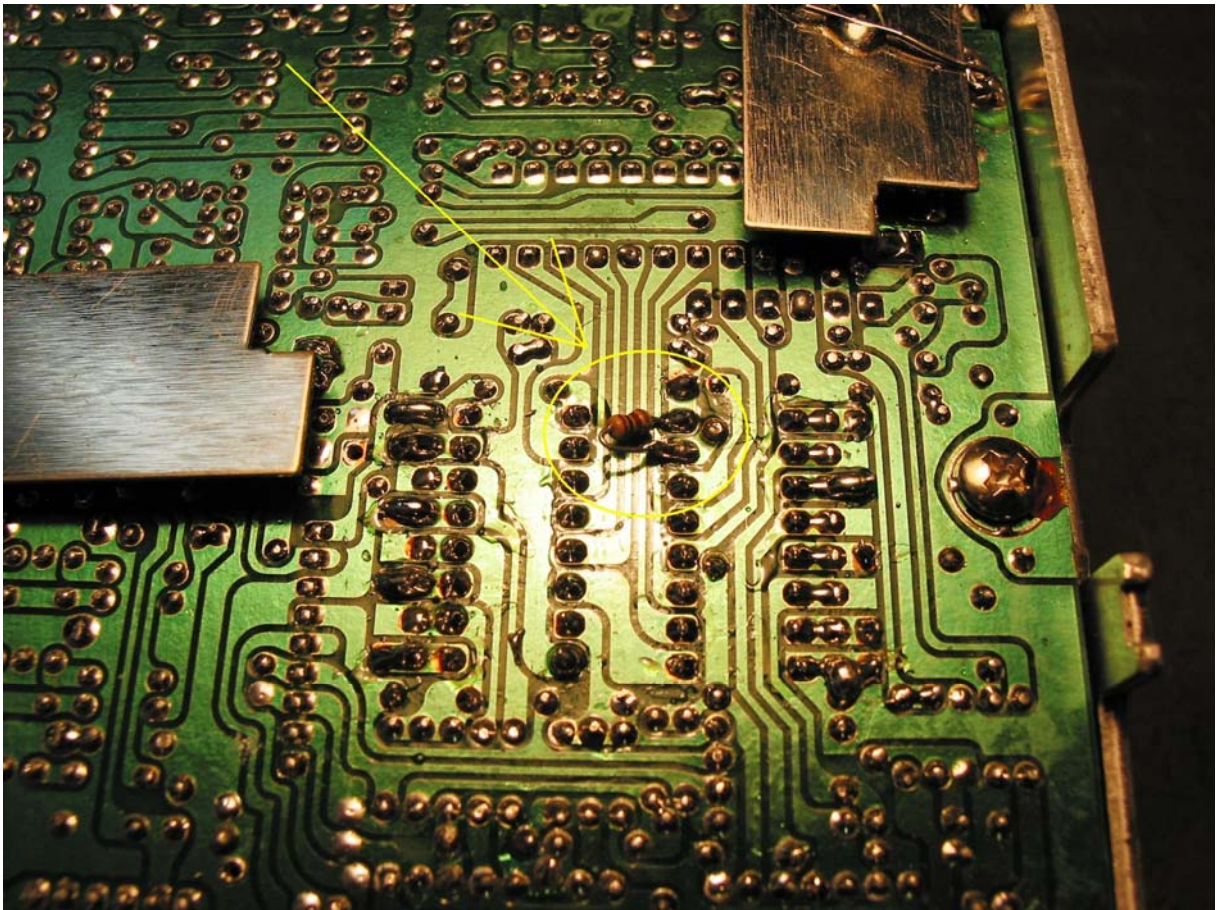


Coté composant démonter la vis de la platine écho
Take down the screw on the echo board

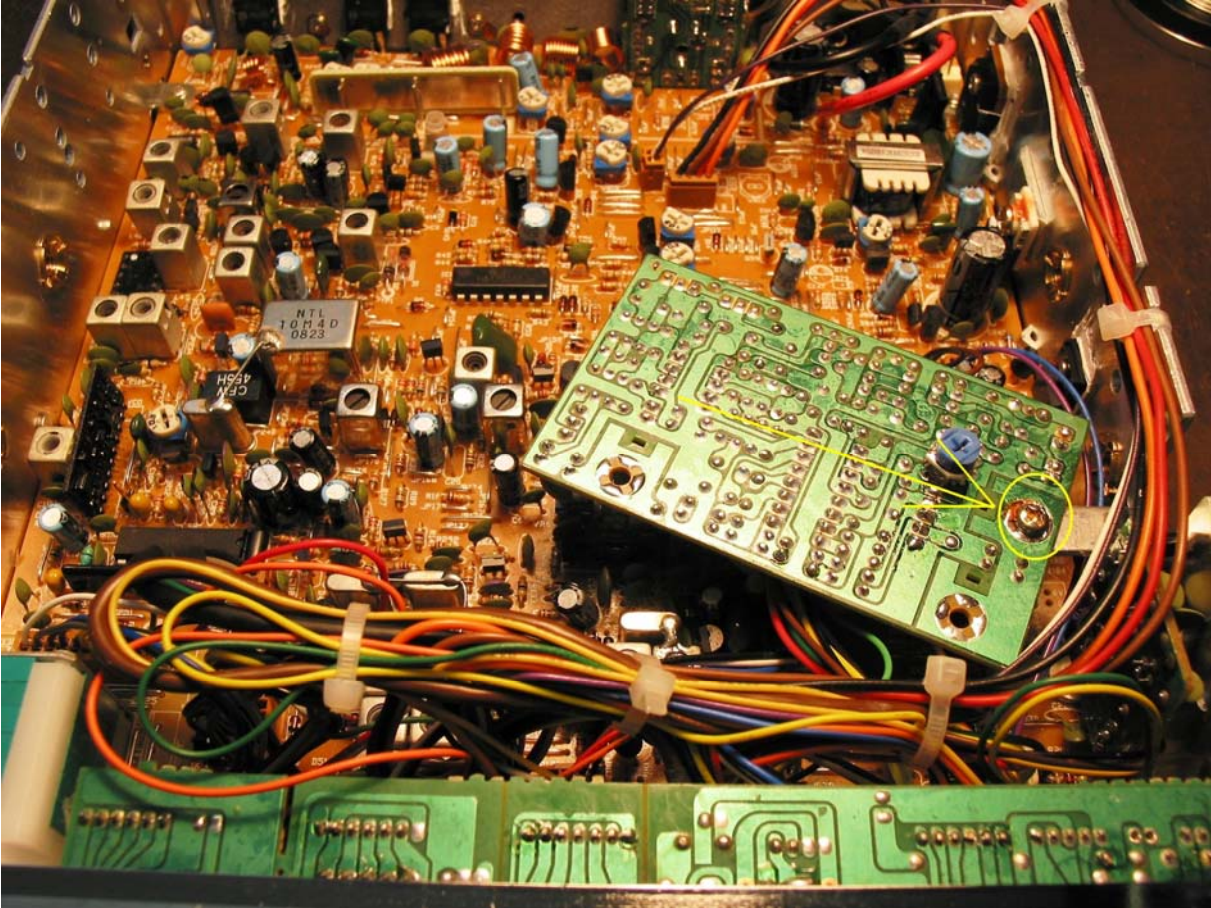


- Voici le fil qui est branché sur J4 et qui faut brancher sur J2
- You can move the echo board to reach the wire which is on J4 : disconnect the wire on J4

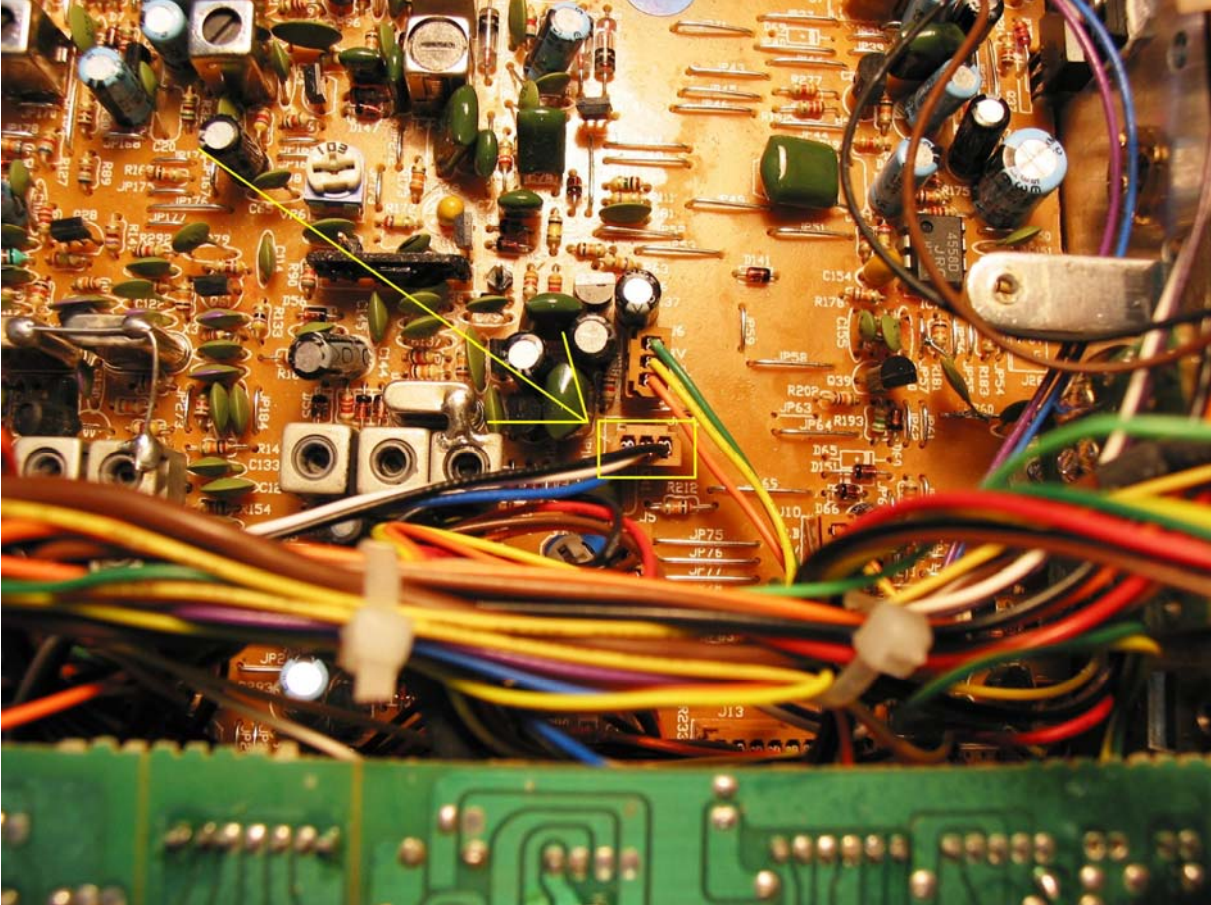


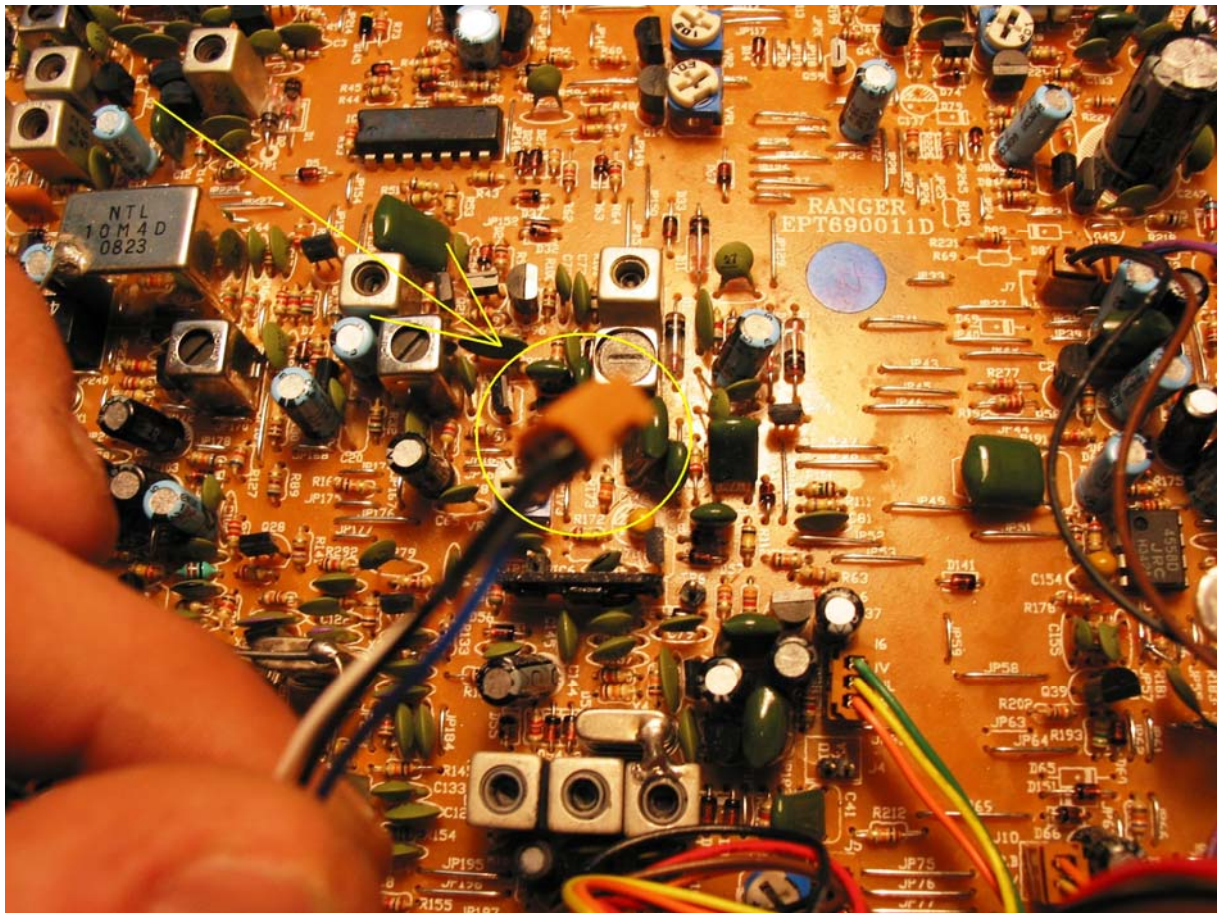

Rechercher au milieu des fils le connecteur J2
Look for the connector J2 in the middle of the wires

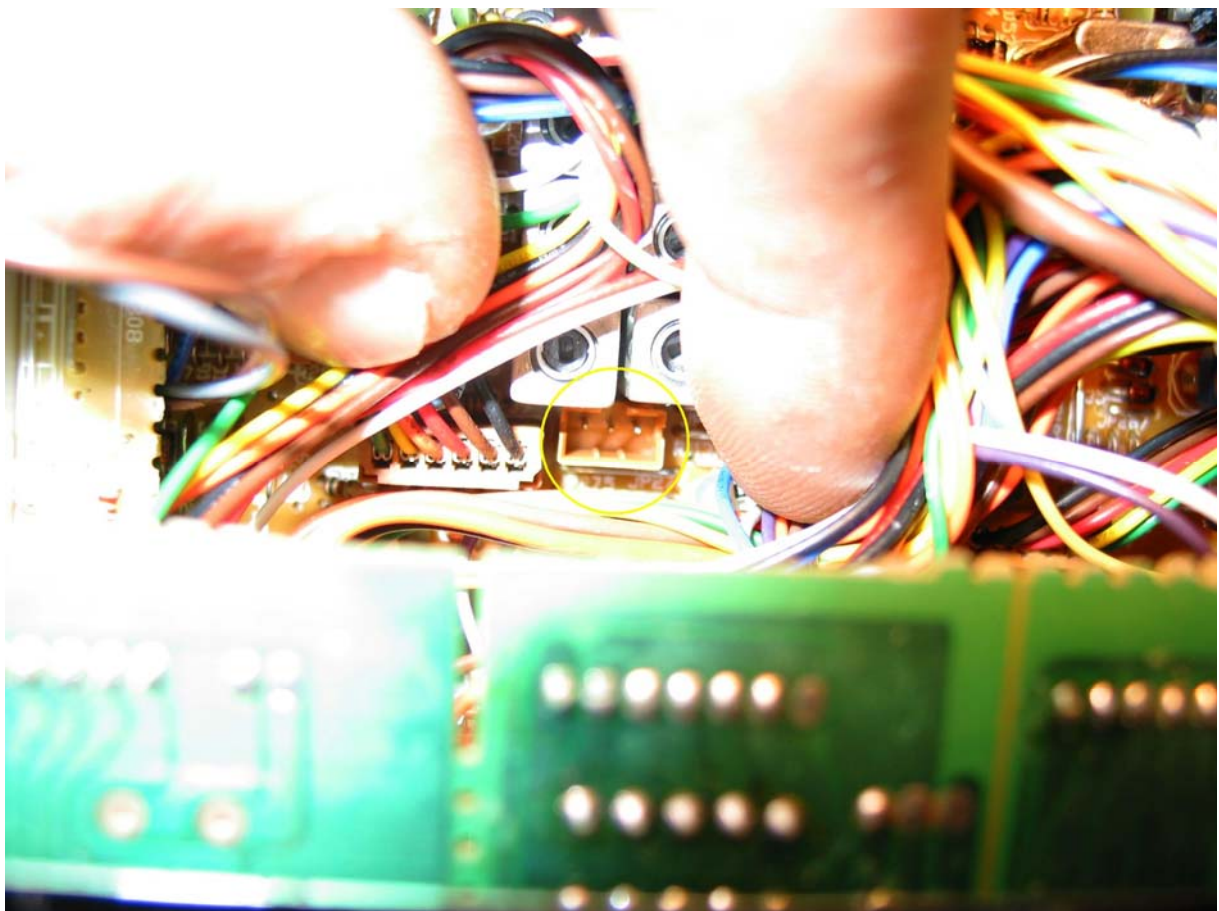

- brancher le fil J4 sur le connecteur J2
- CONNECT the wire J4 on the connector J2

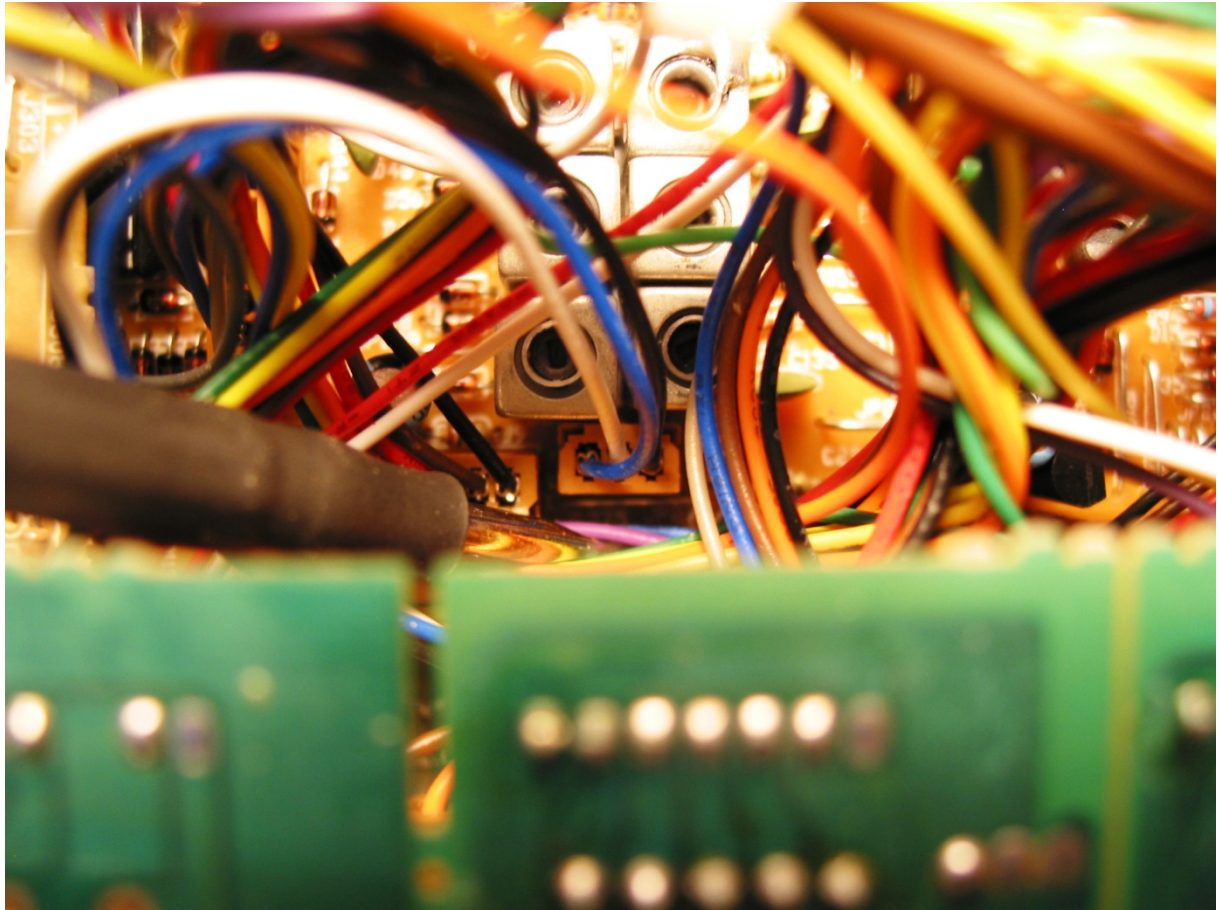

- Déplacer vers la droite le cavalier de configuration
- MOVE THE STRAP **J28** on the right

