


MATSUSHITA AN214(Q) AUDIO POWER AMPLIFIER

| | |
|---------|------------------------------|
| Vcc | 6-16 V (Max 18 V, Typ. 13 V) |
| Iout | Max 1.2 A |
| Iccq | 20 mA |
| Pout | 4 W @ 4 Ohm |
| Pd | 4.5 W |
| THD | 0.3% |
| Top | -20 to +70° C |
| Package | SIL-9-H (20*15*4 mm) |

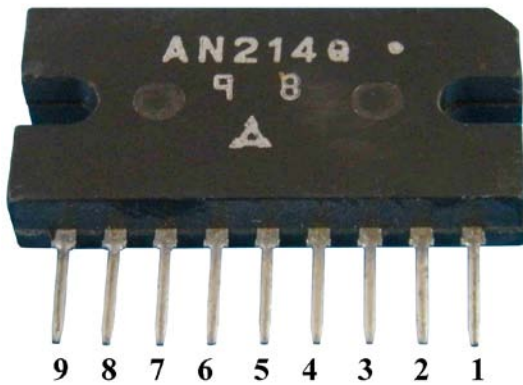

1. Amp out
2. GND
3. C LPF
4. FB Amp In
5. RC FB
6. GND
7. Amp in
8. DC out
9. VCC

Circuit example

